
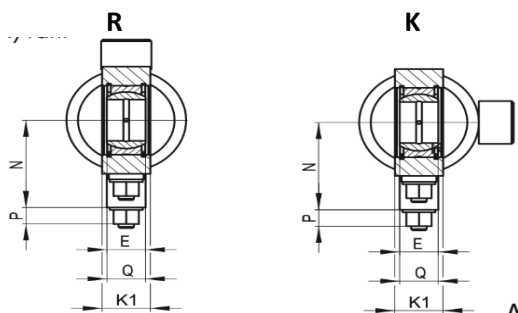


Priamočiary hydromotor

Hydrauli SK


Pootočenie vstupu tlaku k rovine kyvania

Oko zátky pro Ø32.

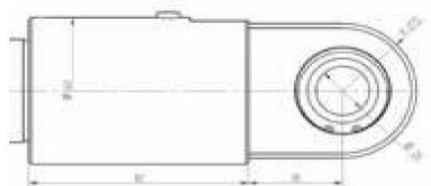

Séria ZH2RT

Pre Pmax 25 Mpa

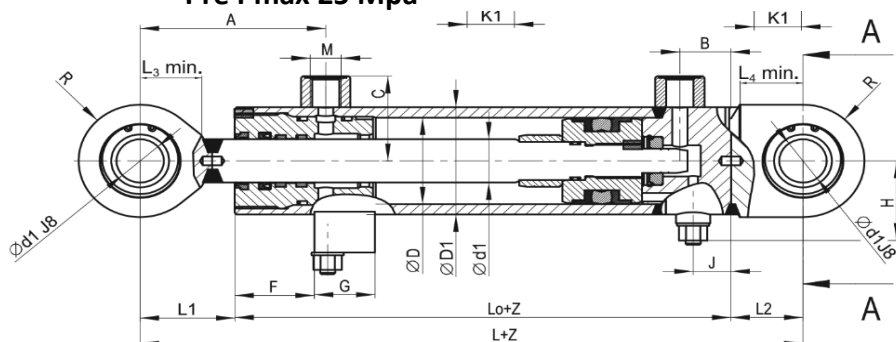

Ø	Ø1	Ø2	Ø3	L	L0	L1	L2	L3 ±1	L4 ±1	M	A	B	C	E	K1	R	F	G	H	J	N	P	Q	Maximálne doporučené zdvihy	Hmotnosť pri zdvihy Z (kg)
32	18	42	20	205	125	45	35	30	30	12x1,5	42	10	39	16	20	27,5	33	32	38	11	43	10	20	160	2,15 + Z x 0,00656
32	20	42	20	205	125	45	35	30	30	12x1,5	42	10	39	16	20	27,5	33	32	38	11	43	10	20	220	2,15 + Z x 0,00703
40	22	50	20	215	135	45	35	30	30	16x1,5	42	15	43	16	20	27,5	33	32	42	13	47	10	20	200	2,85 + Z x 0,00853
40	25	50	20	215	135	45	35	30	30	16x1,5	42	15	43	16	20	27,5	33	32	42	13	47	10	20	290	3,05 + Z x 0,00940
45	25	55	25	225	137	50	38	33	33	16x1,5	45	16	46	20	25	32,5	38	32	43	17	50	10	20	240	3,30 + Z x 0,01000
45	28	55	25	225	137	50	38	33	33	16x1,5	45	16	46	20	25	32,5	38	32	43	17	50	10	20	340	3,46 + Z x 0,01100
50	25	62	25	250	162	50	38	33	33	16x1,5	48	16	49	20	25	32,5	42	32	45	20	53	10	20	200	4,75 + Z x 0,01214
50	28	62	25	250	162	50	38	33	33	16x1,5	48	16	49	20	25	32,5	42	32	45	20	53	10	20	280	4,85 + Z x 0,01312
55	28	70	25	260	161	57	42	37	36	16x1,5	50	17	53	20	25	35	39	38	48	18	60	11	23	240	4,62 + Z x 0,01640
55	32	70	25	260	161	57	42	37	36	16x1,5	50	17	53	20	25	35	39	38	48	18	60	11	23	350	4,80 + Z x 0,01787
60	32	75	25	265	166	57	42	37	36	16x1,5	53	16	56	20	25	35	44	38	51	17	63	11	23	310	6,01 + Z x 0,01880
60	36	75	25	265	166	57	42	37	36	16x1,5	53	16	56	20	25	35	44	38	51	17	63	11	23	420	7,04 + Z x 0,02047
63	36	78	30	285	175	65	45	44	39	16x1,5	58	16	57	22	28	42,5	46	38	52	17	64	11	23	390	7,58 + Z x 0,02103
63	40	78	30	285	175	65	45	44	39	16x1,5	58	16	57	22	28	42,5	46	38	52	17	64	11	23	510	7,81 + Z x 0,02290
65	36	80	30	290	180	65	45	44	39	22x1,5	58	22	58	22	28	42,5	46	38	55	21	65	11	23	370	8,78 + Z x 0,02140
65	40	80	30	290	180	65	45	44	39	22x1,5	58	22	58	22	28	42,5	46	38	55	21	65	11	23	490	8,89 + Z x 0,02327
70	40	85	30	295	185	65	45	44	39	22x1,5	58	23	61	22	28	42,5	48	42	59	21	75	13	25	440	9,71 + Z x 0,02420
70	45	85	30	295	185	65	45	44	39	22x1,5	58	23	61	22	28	42,5	48	42	59	21	75	13	25	600	9,92 + Z x 0,02680
75	40	90	35	335	205	75	55	53	48	22x1,5	63	23	63	25	30	47,5	50	42	62	21	77	13	25	380	11,16 + Z x 0,02512
75	45	90	35	335	205	75	55	53	48	22x1,5	63	23	63	25	30	47,5	50	42	62	21	77	13	25	530	11,39 + Z x 0,02774
80	45	95	35	340	205	80	55	53	48	22x1,5	65	25	66	25	30	47,5	54	42	64	21	80	13	25	480	14,46 + Z x 0,02866
80	50	95	35	340	205	80	55	53	48	22x1,5	65	25	66	25	30	47,5	54	42	64	21	80	13	25	630	15,36 + Z x 0,03160
90	50	105	40	375	230	85	60	57	53	22x1,5	70	28	71	28	35	52,5	62	46	72	25	85	13	25	530	18,90 + Z x 0,03344
90	55	105	40	375	230	85	60	57	53	22x1,5	70	28	71	28	35	52,5	62	46	72	25	85	13	25	680	19,90 + Z x 0,03668
100	55	120	45	410	250	95	65	67	57	27x2	80	30	82	32	38	60	66	50	76	30	95	11	32	570	28,10 + Z x 0,04578
100	63	120	45	410	250	95	65	67	57	27x2	80	30	82	32	38	60	66	50	76	30	95	11	32	810	27,60 + Z x 0,05160
110	63	130	50	430	255	105	70	70	62	27x2	85	30	87	35	40	62,5	73	50	81	28	100	11	32	710	29,40 + Z x 0,05406
110	70	130	50	430	255	105	70	70	62	27x2	85	30	87	35	40	62,5	73	50	81	28	100	11	32	930	31,22 + Z x 0,05980

Zdvih piestnice podľa prania zákazníka

Kĺbové ložisko je prísôsobené i pre mazanie s čapom

Hmotnosť je informatívna +5% uvedené v kg

Priamočiary hydromotor

Hydrauli SK

Uchytenie hydromotorov séria ZH2RT

Uchytenie ZH2RT-A

ZH2RT-AS

Typ válce	D ₁	D ₂	B	Ød	n	L ₀	L _{os}	B _s
32	67	50	10	8,4	4		125	10
40	98	80	12	8,4	6	135	164	40
45	103	85	12	10,5	6	137	169	44
50	113	95	13	10,5	6	162	192	49
55	118	100	13	10,5	6	161	195	52
60	128	108	13	10,5	6	166	204	53
63	138	115	15	13	6	175	215	55
65	138	115	15	13	6	180	215	55
70	148	120	15	13	6	185	221	58
75	155	130	16	15	6	205	242	62
80	168	140	18	15	6	205	242	62
90	178	150	20	15	6	230	277	72
100	200	170	20	17	6	250	296	77
110	210	180	22	17	6	255	310	83

Uchytenie ZH2RT-B

ZH2RT-BS

Typ válce	ØD ₁	ØD ₂	B	d	n	L ₀	L _{os}	B _s
32	88	70	10	8,4	4		125	10
40	98	80	12	8,4	6	135	164	40
45	103	85	12	8,4	6	137	169	44
50	113	95	13	10,5	6	162	192	49
55	118	100	13	10,5	6	161	195	52
60	128	108	13	10,5	6	166	204	53
63	138	115	15	13	6	175	215	55
65	138	115	15	13	6	180	215	55
70	148	120	15	13	6	185	221	58
75	155	130	16	13	6	205	242	62
80	168	140	18	15	6	205	242	62
90	178	150	20	15	6	230	277	72
100	198	170	20	17	6	250	296	77
110	208	180	22	17	6	255	310	83

Uchytenie ZH2RT-C





ZH2RT-CS

Typ válce	A	B h11	C	d f8	E	F	Gx45°	H	K	L ₀	L _{os}	B _s
32	90	55	28	20	53	17,5	1	5	19		125	10
40	105	65	28	20	65	20	1	5	19	135	164	40
45	110	70	33	25	70	20	1	5	22	137	169	44
50	120	80	33	25	80	20	1	5	22	162	192	49
55	135	90	35	25	90	22,5	1	5	23	161	195	52
60	140	95	35	25	95	22,5	1	7	25	166	204	53
63	150	100	40	30	100	25	1,5	7	27	175	215	55
65	155	105	40	30	100	25	1,5	7	27	180	215	55
70	160	110	40	30	105	25	1,5	7	27	185	221	58
75	180	120	45	35	115	30	1,5	7	30	205	242	62
80	185	125	45	35	115	30	1,5	8	31	205	242	62
90	205	135	50	40	135	35	1,5	8	33	230	277	72
100	220	150	55	45	150	35	1,5	10	38	250	296	77
110	240	160	60	50	160	40	1,5	10	40	255	310	83

Uchytenie ZH2RT-D

ZH2RT-CS

Typ válce	B	C	Ød	E	F	G	H	L ₀	L _{os}	C _s	B _s
32	20	15	10,5	65	88	10	36		125	15	10
40	24	20	10,5	75	100	12	31	135	164	49	40
45	24	20	13	80	105	12	35	137	169	52	44
50	24	20	13	88	110	14	38	162	192	50	49
55	26	20	13	98	123	16	43	161	195	54	52
60	30	25	15	107	135	16	47	166	204	63	53
63	30	25	15	110	138	18	50	175	215	65	55
65	30	25	15	110	138	18	50	180	215	60	55
70	34	27	17	118	150	20	55	185	221	63	58
75	34	27	17	125	158	20	55	205	242	64	62
80	40	30	21	140	180	24	60	205	242	67	62
90	40	30	21	150	190	24	65	230	277	77	72
100	48	34	25	170	215	26	75	250	296	80	77
110	48	34	25	180	230	26	80	255	310	89	83

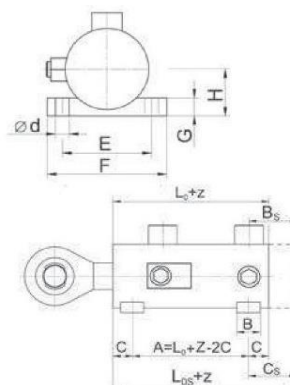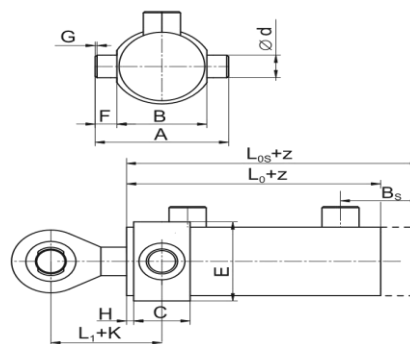

Kóta Los platí pre prevedenie PČH so šrubovacím dnom

Kontaktné informácie

Hydraulisk s.r.o., Priemyselna 2977, Bardejov 085 01, email: hydraulik@hydraulisk.sk, Mob: +421 905 178 728, +421 905 341 240